

ADS1802

User manual

Dear user,

Thank you for purchasing ADS1802 (TOYOTA Scan Tool). This manual (Android version) contains usage and after service, please read it carefully before using.

CONTENT

I. Software Installation	01
II. Software Registration	07
III. Testing Instructions	10
[After Service]	12

I. Software Installation

1. Software download

Put software into mobile phone from CD or download software from internet.

1) Put CD into CD-ROM of your pc or laptop, open it and copy file named

“APK” into memory card of mobile phone;

2) Download software from website:

Steps 1: Open IE Explorer and visit: <http://english.adsscan.com> (Figure-01)



Figure-01

Steps 2: Click the "Upgrade" interface and download the software on your computer.

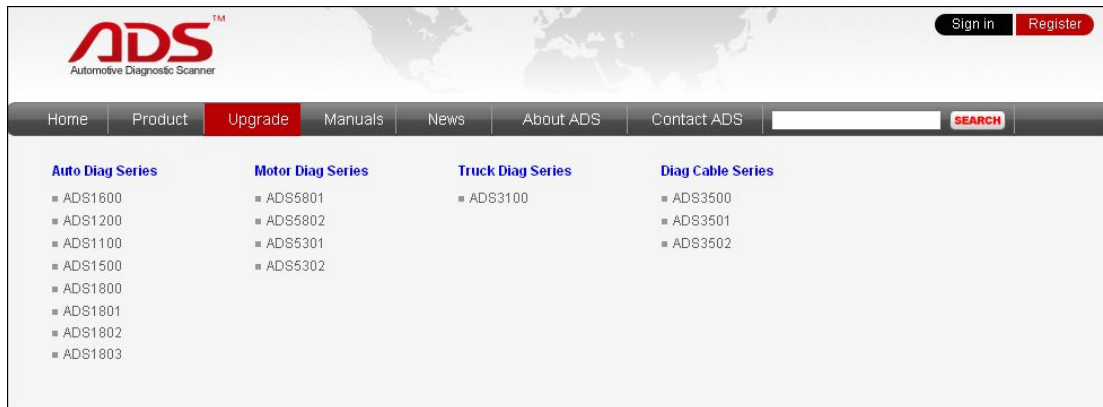


Figure-02

2. Program installation

Steps 1: Copy file“APK”into mobile phone memory card and find a program named “My Files”.



Figure-03

Steps 2: Open the My Files >>> All Files>>> sdcard0>>> ADS1802 TOYOTA Scan Tool , and find out “ADS1802 TOYOTA Scan Tool.apk”;

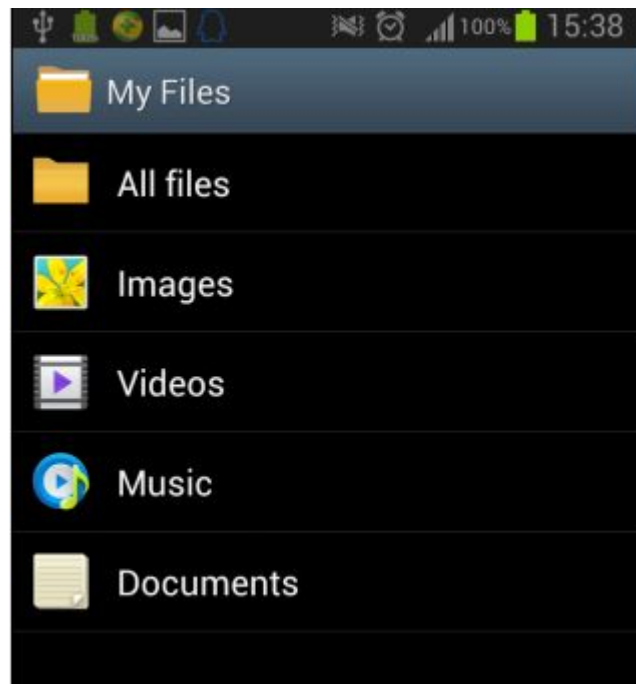


Figure-04

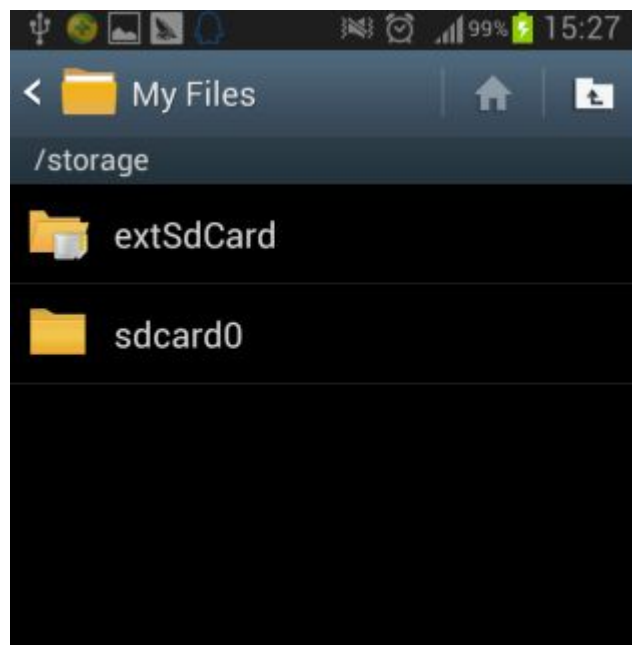


Figure-05

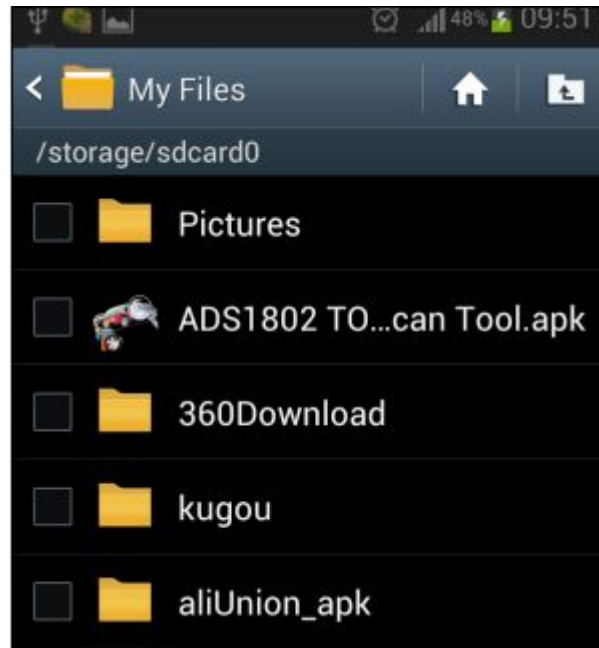


Figure-06

Steps 3: click and it will display the interface as Figure-07, click the “Install” button and start to install (Figure-9).

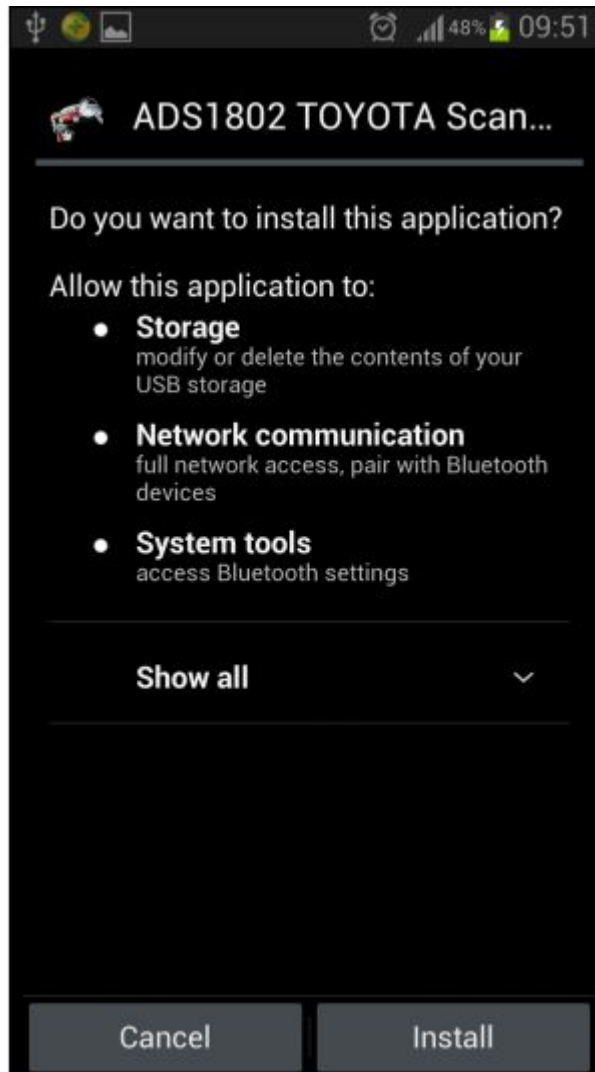


Figure-07

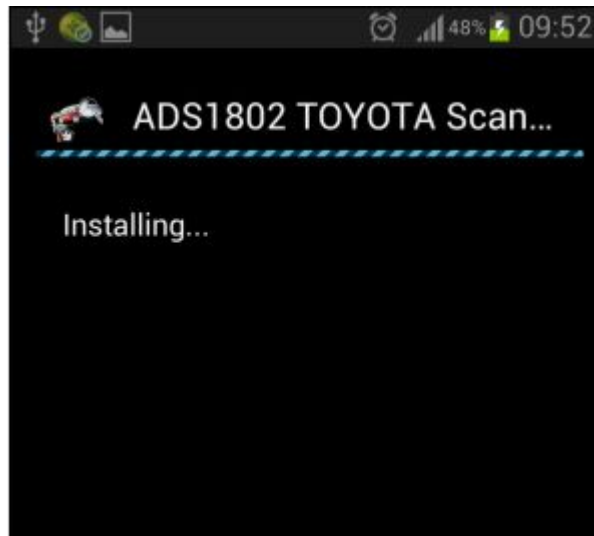


Figure-08

Steps 4: After complete installation, it will display "Application installed" :

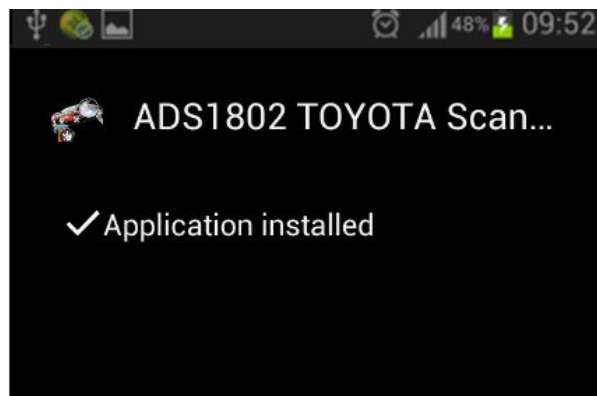


Figure-09

Steps 5: Then the "ADS1802 TOYOTA Scan Tool" software icon will display on the application program interface (Figure-10).



Figure-10

II. Software Registration

Steps 1: Connect the Diagnostic Device to your PC and ensure that the Bluetooth Diagnostic Device power indicator lights. And the green light flash.



Figure-11



Figure-12

Steps 2: Open mobile phone, enter Settings:



Figure-13

Steps 3: Open the Bluetooth and scan for the device:



Figure-14



Figure-15

Steps 4: You will find ADS device and click it to pair with ADS device, the Passwords is 1234 or may be 0000.

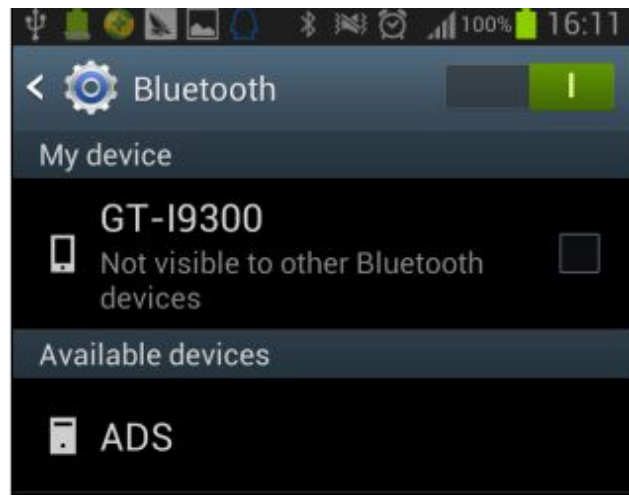


Figure-16

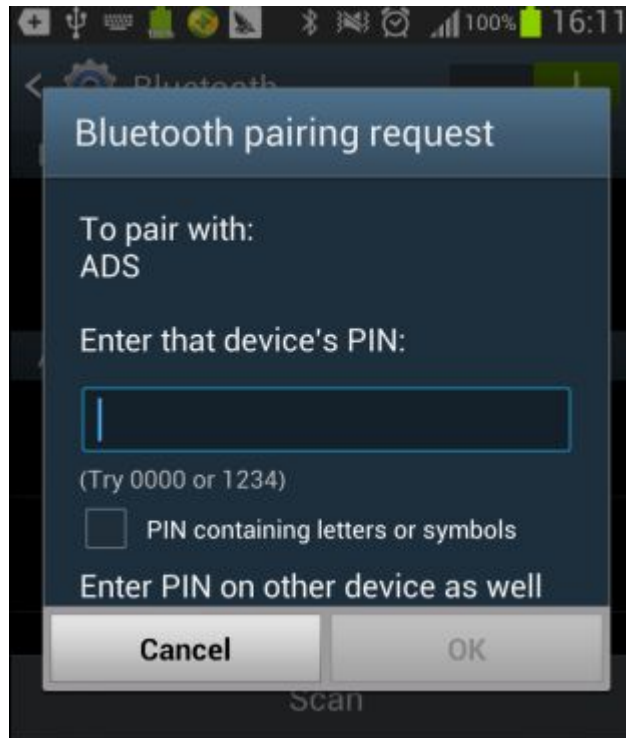


Figure-17

Steps 5: ADS device has been paired, then you can test directly.

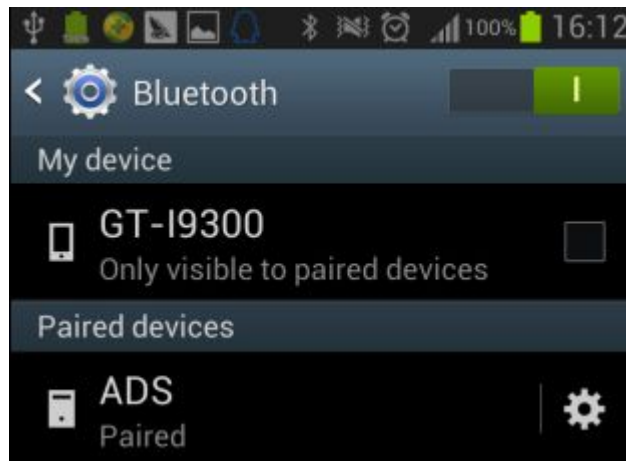


Figure-18

III. Testing Instructions

Steps 1: Open your phone’s software main interface and enter “ADS1802 TOYOTA Scan Tool” software .



Figure-19

Steps 2: It will display interface of three titles as:

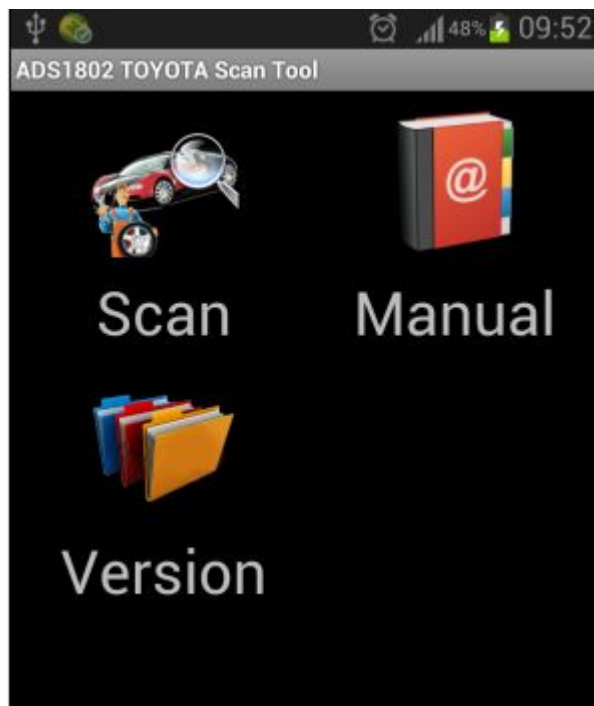


Figure-20

- [Scan]: Car diagnostic testing into menu.
- [Manual]: Equipment software installation and operation instructions.
- [Version]: Wireless Bluetooth diagnostic instrument hardware and

mobile phone testing software version information.

Steps 3: Choose SCAN and start to test as Figure :


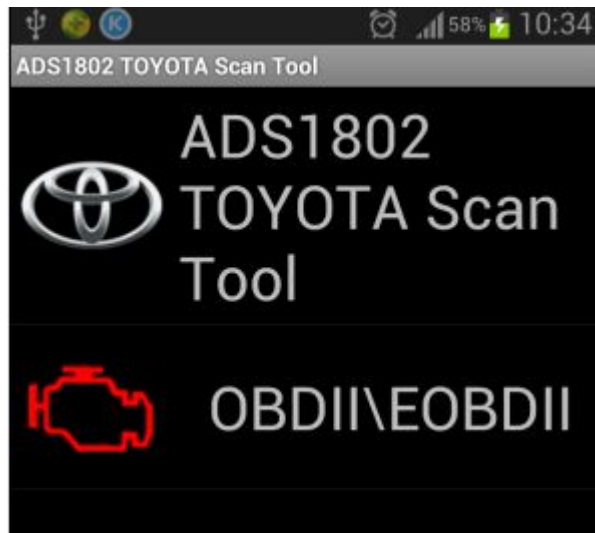


Figure-21



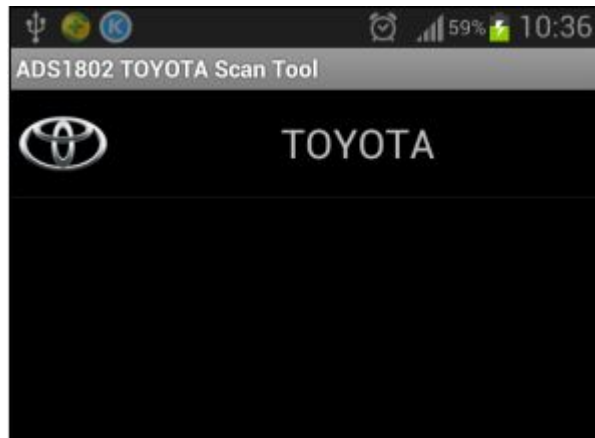

[After Service]

- Warranty: Within one year.
- URL: <http://english.adsscan.com>
- Tel/Fax: +86-755-89368397
- E-mail: sales@adsscan.com